

<How to use HelloDevice Manager V2>

May 15, 2015
Technical Support Team
BS Park

1. Connect the Sena device to network hub with the provided Ethernet Cable(Straight Type), and then provide the power on the device.

2. Download the 'HelloDevice Manager V2' program from the below page and install it.


http://www.senanetworks.com/download/software/setup_hdmgr-v2.0.5.exe

3. Execute the installed 'HelloDevice Manager V2' program.

4. To probe Sena products on your network, execute the [Search]-[Probe]. (via UDP port#2002). If the PC is under firewall, please set the firewall to Disable.



5. Select devices you want to search, and then push the [Add] button. After that, push the [Close] button.

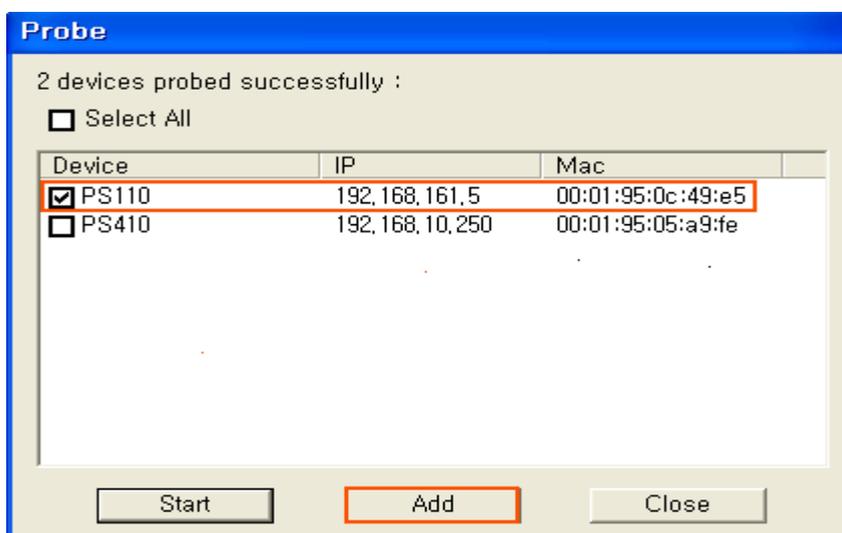

- Select a device you want to change settings on the Device List.
Insert a ID and Password ('root/root' or 'admin/admin'), and then push the [OK] button.



- Users can find out or change settings of the device on the 'Configuration' tap.
If users change any settings, execute the [Device]-[Set] button, and then the device will restart.

